

# TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 55/65 D, BPR 60/65 D



**Maximum longevity**

Full protection hood - engine and components protected all around



**Precise and save to operate**

Comfortable control lever




**Higher quality, lower costs**

ECONOMIZER - The compacton display (optional)

**Shipping dimensions in m3**

**BPR 55/65 D** 0,873  
**BPR 60/65 D** 0,873

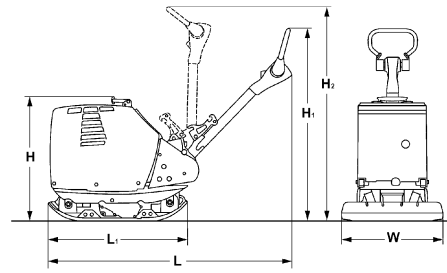

**Standard Equipment**

- Engine protection hood
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Automatic decompression
- Multi-functional, foldable single-point lifting facility
- Extension plates (650mm)
- Electric starter
- Recoil starter
- Back-up drive protection
- Warning signal at low oil level (BPR55/65D)
- 3-2-1 Warranty
- Hour meter

**Optional Equipment**

- ECONOMIZER (+5kg)
- Tool kit
- Special painting
- Plastic mat
- Extension plates (550/750mm)
- Service Kit
- US Version EPA 4 NRTC (BPR60/65D)
- TOUGH WARRANTY

**Dimensions in mm**

	H	H1	H2	L	L1	W	W1	W2
<b>BPR 55/65 D</b>	790	980	1350	1700	900	450	650	750
<b>BPR 60/65 D</b>	790	980	1380	1700	900	450	650	750

**Technical Data**

**Weights**

	kg	BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Operating weight CECE (W)	435	435	440
Operating weight CECE (W1)	455	455	460
Operating weight CECE (W2)	466	466	471
Basic weight	450	450	455

**Dimensions**

	mm	BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Basic working width	650	650	650
Working width without extension bars (W)	450	450	450
Lowest passing height	790	790	790
Min. height w. steering in top position	980	980	980
Max. height w. steering in top position	1.220	1.220	1.220

**Driving Characteristics**

	m/min	BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Working speed, max.	28	28	28
Max. gradeability (dep. on soil con.)	35	35	35

**Drive**

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Engine manufacturer		Lombardini	Hatz
Type		15 LD 440	1B40
Emission stage		non EPA	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	6,8	6,7
Speed	min-1	3.000	3.000
Drive system		mech. diesel	mech. diesel
Fuel		1,4	1,5
Fuel comsump. aver. during operation	l/h	1,4	1,5

**Exciter system**

	Hz	BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Frequency	66	66	66
Centrifugal force	kN	55	60
Amplitude	mm	1,85	1,96

**Capacities**

	l	BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Fuel	5,0	5,0	5,0

Technical modifications reserved. Machines may be shown with options.

